


Product	Stiffness (EI) x10 ⁹ lb-in ² /ft kN-m ² /m	Allowable Moment (M) ft-lb/ft kN-m/m	Section Modulus (Z) in ³ /ft cm ³ /m	Moment of Inertia (I) in ⁴ /ft cm ⁴ /m	Thickness Web/Flange (t) in mm	Section Depth (D) in mm	Section Width (W) in mm	Standard Packaging Sheets/Bundle	Profile
SG-950	130	15,147	56.8	341	0.715	12	18	6	Z
	1,224	67.37	3,054	46,567	18.1	305	457		
SG-825	84	9,787	36.7	220	0.485	12	30	5 and 10	Box
	791	43.53	1,973	30,043	12.3	305	762		
SG-850	71	9,920	37.2	186	0.515	10	18	12	Z
	668	44.12	2,000	25,400	13.1	254	457		
SG-750	60	8,480	31.8	159	0.480	10	18	12	Z
	564	37.71	1,710	21,700	12.2	254	457		
SG-650	56	7,893	29.6	148	0.39	10	18	12	Z
	527	35.11	1,591	20,212	9.80	254	457		
SG-625	46	6,507	24.4	122	0.385	10	30	6 and 12	Box
	433	28.94	1,312	16,660	9.8	254	762		
FP-575	35	8,320	31.2	91	0.290/0.475	9	24	6 and 12	Flat Panel
	330	37.01	1,677	12,430	7.4/12.1	229	610		
CL-9900	34	5,333	20.0	90	0.35	9	24	20	Box
	320	23.72	1,075	12,290	8.90	229	610		
SG-550	28	4,933	18.5	74	0.350	8	12	20	Z
	264	21.94	995	10,105	8.9	203	305		
CL-9000	28	4,320	16.4	74	0.280	9	24	20	Box
	264	19.22	871	9,969	7.1	229	610		
SG-425	22	3,813	14.3	57	0.29	8	24	20	Box
	207	16.96	769	7,784	7.2	203	610		
FP-475	17	5,467	20.5	45	0.240/0.250	7	24	12	Flat Panel
	160	24.32	1,102	6,145	6.1/6.4	178	610		
SG-325	15	2,960	11.1	39	0.250	7	24	20	Box
	141	13.17	597	5,326	6.4	178	610		
SG-225	7	1,920	7.2	18	0.225	5	18	15	Box
	64	8.54	387	2,458	5.7	127	457		

Premium* & Standard Color Options:



PROFILE:
Flat Panel™



Woodgrain
Brown*




Woodgrain
Green*




Textured
Grey



Textured
Clay



PROFILE: BOX



PROFILE: Z



Grey



Clay



Brown



Slate

DETERMINING ALLOWABLE MOMENT

Sample Vinyl Calculation: SG-650

$$\begin{aligned}
 M_a &= Z \times f_b \\
 &= 29.6 \text{ in} / \text{ft}^3 \times 3,200 \text{ psi} \\
 &= 94,720 \text{ in-lbs/ft} / 12 \text{ in/ft} \\
 &= 7,893 \text{ ft-lbs/ft}
 \end{aligned}$$

3,200 psi is the allowable design stress recommended by the U.S. Army Corps of Engineers.

VINYL CORNER PIECES


*Standard Length: 20 - 30 ft



CORNER	COLOR OPTIONS	RELATED SHEET PILING
1 SG 225 - 425	Grey, Clay, Brown, Slate, Woodgrain Brown	FP-575, FP-475, CL-9900, CL-9000, SG-425, SG-325, SG-225
2 SG 550	Grey, Clay, Brown, Slate	SG-550
3 SG 650 - 750	Grey, Clay, Slate	SG-850, SG-825, SG-750, SG-650, SG-625
4 SG 950	Grey, Clay	SG-950

CAPPING PIECES

*Standard Length: 10 - 20 ft

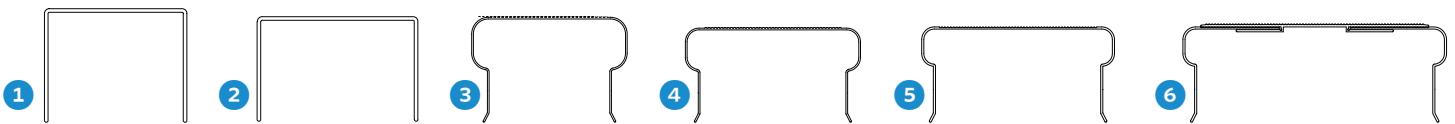

CAP	RELATED SHEET PILING
1 VersaCap® 7.5	SG-325, FP-475
2 VersaCap® 8.5	SG-425, SG-550
3 AW-575 CAP & AW-575 STR CAP	SG-225
4 AW-850 CAP & AW-850 STR CAP	FP-475, SG-550, SG-425, SG-325
5 AW-1075 CAP & AW-1075 STR CAP	SG-850, SG-750, FP-575, SG-650, SG-625, CL-9900, CL-9000
6 AW-1500 CAP	SG-950, SG-825